



Thank you for purchasing this product. Before using the product, read through the user manual to ensure that you will use the product correctly. Please keep this manual for future reference.

Features

- Clip-on lavalier mic provides high intelligibility for lecturers, stage/TV performers and singers
- Designed to be worn as a lavalier or hidden in loose clothing or in the hair
- Wide-range capability ensures clean, accurate reproduction
- Small size provides excellent yet unobtrusive sound pickup
- Rugged design and construction for reliable performance
- MT830a and MT830R wired version's power module (AT8531 / AT8538) include a high-pass filter that provides a steep low-frequency attenuation to improve sound pickup without affecting voice quality
- The power module (AT8531) of MT830a can be operated on battery or phantom power
- Wireless version equipped with cW-style locking or cH-style screw-down 4-pin termination for Audio-Technica wireless systems

Notes on use

MT830a wired version includes a power module AT8531 with 1.4 m cable that requires 11V to 52V DC phantom power, or a 1.5V AA battery for operation. A battery need not be in place for phantom power operation. An integral 80Hz high-pass filter provides easy switching from a flat frequency response to a low-end roll-off. The output of the power module is a 3-pin XLRM-type connector.

MT830R wired version includes a power module AT8538 with 7.6 m cable that requires 11V to 52V DC phantom power only. Also has an integral 80Hz high-pass filter for a low-end roll-off. The roll-off position reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically coupled vibrations.

MT828cW and MT828cH wireless versions do not contain power module and includes clothing clip and windscreens only. 1.4 m cable terminated with locking 4-pin connector. The connector is also compatible with Audio-Technica cW and cH type body-pack transmitters.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 43°C for extended periods. Extremely high humidity should also be avoided.

Safety precaution


Although this product was designed to be used safely, failing to use it correctly may result in an accident. To ensure safety, observe all warnings and cautions while using the product.

Cautions for the product

- Do not subject the product to strong impact to avoid malfunction.
- Do not disassemble, modify or attempt to repair the product.
- Do not handle the product with wet hands to avoid electric shock or injury.
- Do not store the product under direct sunlight, near heating devices or in a hot, humid or dusty place.

Connection procedure

Connect the output terminals of AT8531 or AT8538 power module to the device that has a microphone input (balanced input) compatible with a phantom power supply. The output connector is an XLRM-type with polarity as shown in the figure below.



This product requires 48 V DC phantom power.

Specifications


Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Omnidirectional
Frequency response	30 - 20,000 Hz
Low Frequency response	80 Hz, 12dB/octave (MT830a) / 80 Hz, 18dB/octave (MT830R)
Open circuit sensitivity	-34 dB (19.9 mV) re 1V at 1 Pa (MT830a / MT830R) -62 dB (0.79 mV) re 1V at 1 Pa (wireless only)
Impedance	200 ohms (MT830a / MT830R) 1,600 ohms (wireless only)
Phantom power requirements	11-52 V DC, 2 mA typical (MT830a / MT830R)
Battery Type	1.5V AA (MT830a)
Battery Current / Life	2.0 mA / 1200 hours (MT830a)
Switch	Flat, roll-off (MT830a / MT830R)
Current consumption	0.2 mA typical at 5V (wireless only)
Weight	Microphone, boom and earpiece: 1.3 g Power module (AT8538): 81 g / (AT8531): 81.2 g
Dimensions	Microphone: 15.8 mm long, 8.3 mm wide, 5.0 mm thick Power module (AT8538): 92.9 mm long, 18.9 mm diameter / (AT8531): 83.0 mm x 63.0 mm x 22.0 mm (H x W x D)
Output connector	Integral 3-pin XLRM-type (MT830a / MT830R)
Cable	7.6 m (MT830R only) / 1.4 m long (permanently attached), 2.5 mm diameter, 2-conductor shielded cable (termination dependent)
Included accessories	Wire clothing clip; Windscreens; protective pouch; (wired only) - AT8531 power module (MT830a) / AT8538 power module (MT830R)

• 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL


* Typical, A-weighted, using Audio Precision System One.

For product improvement, the product is subject to modification without notice.


Polar pattern



LEGEND



Frequency response

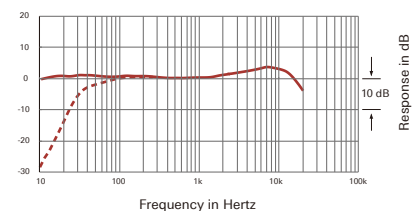

LEGEND



Cable Terminations

MT830cW – Terminated with locking 4-pin connector for use with A-T UniPak⁺ body-pack transmitters



	Pin 1	Pin 2	Pin 3	Pin 4
Function	Ground / Shield	Instrument	Mic Audio	Blas + In
Wire Colour	Copper Wire	Jumper to Pin 1	White	Red

MT830cH – Terminated with locking 4-pin connector for use with A-T CH body-pack transmitters



	Pin 1	Pin 2	Pin 3	Pin 4
Function	Ground / Shield	Instrument	Mic Audio	Blas + In
Wire Colour	Copper Wire	Jumper to Pin 1	White	Red

MT830cT4 – Terminated using TA4F-type connector




	Pin 1	Pin 2	Pin 3	Pin 4
Function	Ground / Shield	Blas + In	Mic Audio	Source Load
Wire Colour	Copper Wire	Red	White	Jumper to Pin 1

MT830cL4 – Terminated using Lemo[®] connector



	Pin 1	Pin 2	Pin 3	Shell / Case
Function	N/C	N/C	Blas + In, Mic Audio	Ground / Shield
Wire Colour	Open	Open	White	Copper Wire

MT830cLM3 – Terminated using locking 3.5 mm connector



	Sleeve	Ring	Tip
Function	Ground / Shield	Mic Audio	Blas + In
Wire Colour	Copper Wire	White	Red

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan

©2017 Audio-Technica Corporation

Global Support Contact: www.at-globalsupport.com



感谢您购买本产品。在使用产品之前，请全文浏览本用户手册以确保您将正确地使用本产品。请妥善保存本手册，以供将来参考。

产品特点

- 提供高清晰度的领夹式收音头，适合在教学、演唱、舞台、电视广播上使用。
- 提供优秀和不显眼的设计，可藏在宽松的衣服或头发中
- 宽量程清晰及准确的播放能力
- 体积小巧，收音效果出色但不引人注意
- 性能可靠的坚固设计和结构
- MT830a 和 MT830R 有线版本的电源模块(AT8531 / AT8538)设有高通滤波器，可提供陡峭的低频衰减，从而改善声音拾取，而不会影响语音质量
- MT830a 的电源模块（AT8531）可以使用电池或幻象电源供电工作
- 无线版本，配备cW型锁定或cH型螺旋式4针端接，用于Audio-Technica无线系统

使用注意事项

MT830a 有线版本配有一个AT8531供电模组，线长1.4米，需要提供11V至52V幻象供电或1.5V AA电池操作，当使用幻象电源操作时，可以不安装电池，供电模组的输出端为内置 3 针XLRM 卡农公头。供电模组内置高通滤波电路，可轻易由平直的频率响应，模组的输出为3针XLRM型端子。

MT830R 有线版本配有一个AT8538供电模组，线长7.6米，仅需要11V至52V直流幻象电源。并具有高通滤波电路，提供于80 Hz以下衰减的收音效果，应用高通滤波器可减低话筒在近距离讲话收音时的喷气声，并可减低收音环境中低频噪

MT830cW 和 MT830cH 无线版本不带供电模组，但提供领带夹和防风棉，长1.4米音频线输出，可配置于所有鐵三角Audio-Technica cW 或 cH 型的盒式无线发射机中。

把话筒暴露于高温中可能导致输出电平逐渐及永久性减弱，应避免将话筒留在日晒的地方或长时间置于温度超过43°C的地方，而极高湿度也应避免。

安全预防措施


虽然本产品采用安全设计，但使用不当仍可能发生事故。为了确保安全，使用本产品时请注意全部警告和提醒。

本产品注意事项

- 切勿让本产品遭受强烈冲击，以避免发生故障。
- 切勿拆开、改装或尝试维修本产品。
- 切勿用湿手握持本产品，以免触电或受伤。
- 切勿将本产品存放在阳光直射的地方、加热装置附近或者炎热、潮湿或多尘的地方。

连接步骤

将AT8531/AT8538 供电模组的输出端子连接到具有兼容幻象电源的话筒输入（平衡输入）的设备。输出接口是 XLRM 型接口，其极性如下图所示。



本产品使用直流 48V 幻象电源。

规格


元件	固定充电背板，静电型电容式
指向性	全方向指向性
频率响应	30 - 20,000 Hz
高通滤波	80 Hz, 12dB/倍频 (MT830a) / 80 Hz, 18dB/倍频 (MT830R)
开路灵敏度	-34 dB (19.9mV) 以 1V / 1Pa (MT830a / MT830R) -62 dB (0.79mV) 以 1V / 1Pa (无线型号)
阻抗	200 欧姆 (MT830a / MT830R) 1,600 欧姆 (无线型号)
幻象供电	直流 11-52V, 2mA 典型 (MT830a / MT830R)
电池	1.5V 5号电池 (MT830a)
耗电/电池寿命	2.0 mA / 1200 小时 (MT830a)
开关	平直，高通滤波 (MT830a / MT830R)
耗电	0.2 mA 典型于 5V (无线型号)
重量	收音头(不含连线): 1.3 克 供电模组 (AT8538): 81 克 / (AT8531): 81.2 克
尺寸	收音头: 长 15.8 mm, 宽 8.5 mm, 厚 5.0 mm 供电模组 (AT8538): 长 92.9 mm, 外径 18.9 mm / (AT8531): 高 83.0 mm, 宽 63.0 mm, 厚 22.0 mm
输出端子 (供电模组)	内置式 3 针卡农公头
连接线	长 1.4 米 (固定连接于话筒) / 7.6 米 (MT830R), 直径 2.0 mm, 2芯屏蔽式连线并配置连接端子 (连接端子类型视乎不同型号)
附带配件	领带夹; 防风棉; 便携保护袋; (有线型号)- AT8531供电模组 (MT830a) AT8538供电模组 (MT830R)

· 1 帕 = 10 达因 / 平方厘米 = 10 微巴 = 94 dB SPL


*典型，A 计权，使用 Audio Precision System One

因产品改进，本产品会随时改装，恕不另行通知。


指向性




比例是每分隔音 5 分贝



频率响应

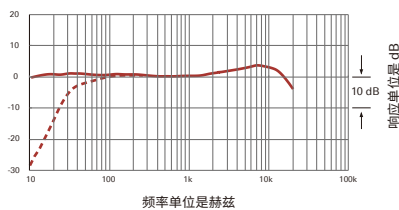

频率单位是赫兹



接线端子

MT830cW - 以锁固式4式针端子，使用于鐵三角 A-T UniPak® 盒式无线发射机



针脚1	针脚2	针脚3	针脚4
功能	地线 / 屏蔽	乐器	话筒音频
导线颜色	裸铜线	与 针脚1 跳线	白色

MT830cH - 以锁固式4式针端子，使用于鐵三角 A-T CH型 盒式无线发射机



针脚1	针脚2	针脚3	针脚4
功能	地线 / 屏蔽	乐器	话筒音频
导线颜色	裸铜线	与 针脚1 跳线	白色

MT830cT4 - 以TA4F端子




针脚1	针脚2	针脚3	针脚4
功能	地线 / 屏蔽	偏压+输入	话筒音频
导线颜色	裸铜线	红色	白色

MT830cL4 - 以Lemo® 端子



针脚1	针脚2	针脚3	外壳
功能	空置	偏压+输入，话筒音频	地线 / 屏蔽
导线颜色	不连接	白色	裸铜线

MT830cLM3 - 以锁固式3.5 mm端子



Sleeve	Ring	Tip
功能	地线 / 屏蔽	话筒音频
导线颜色	裸铜线	白色